



PRICE-LIST • Dated : 4th JULY 2024 • W.E.F. : 24th JULY 2024 • LP NO. 07/2024-25

**FR / PVC INSULATED INDUSTRIAL FLEXIBLE CABLE**

Polycab FR PVC Insulated Single Core Unsheathed Industrial Flexible Cable conforming to IS 694:2010 with Bright Annealed Copper Conductor for Voltage Grade 1100 Volts

Rate Per Meter

COND. AREA SQ.MM	COND. CONST. (NO./ DIA.MM)	AMPS.	SINGLE CORE	PKG.
0.50	16/0.20	05	13.10	24
0.75	24/0.20	08	18.35	24
1.00	32/0.20	13	23.40	20
1.50	30/0.25	17	33.75	16
2.50	50/0.25	24	55.55	12
4.00	56/0.30	30	86.20	8
6.00	84/0.3	38	128.50	6
10.00	80/0.4	52	225.25	1
16.00	126/0.4	70	352.00	1
25.00	196/0.4	88	554.00	1
35.00	276/0.4	110	774.00	1
50.00	396/0.4	145	1104.00	1
70.00	354/0.5	215	1561.00	1
95.00	484/0.5	260	2060.00	1
120.00	608/0.5	305	2654.00	-
150.00	750/0.5	355	3322.00	-
185.00	925/0.5	415	4133.00	-
240.00	1210/0.5	500	5395.00	-
300.00	1527/0.5	585	6751.00	-
400.00	2036/0.5	695	8994.00	-

Polycab PVC Insulated and PVC Round Sheathed Multi Core Bright Annealed Bare Copper Conductor Heavy Duty Industrial Flexible Cables for Voltage Grade 1100 Volts conforming to IS:694:2010

Rate Per Meter

2 Core	3 Core	4 Core	2 CORE to 4 CORE PKG.	5 Core	6 Core
34.50	47.25	60.45	5	75.95	90.95
46.10	64.05	82.30	5	107.50	129.10
58.65	81.50	105.25	5	139.00	166.00
79.75	113.25	148.25	5	189.00	230.00
129.00	181.00	239.50	4	310.00	371.00
193.00	278.50	366.00	1	489.00	586.00
284.00	410.50	540.00	1	720.00	864.00
486.00	708.00	931.00	1	1242.00	-----
761.00	1107.00	1461.00	-	1905.00	-----
1268.00	1837.00	2399.00	-	3463.00	-----
1765.00	2551.00	3353.00	-	4745.00	-----
2507.00	3634.00	4799.00	-	6867.00	-----
3561.00	5041.00	6664.00	-	9389.00	-----
(FRLS) +	7286.00	9613.00	-	-----	-----
(FRLS) +	9251.00	12212.00	-	-----	-----
(FRLS) +	11565.00	15266.00	-	-----	-----
(FRLS) +	14244.00	18826.00	-	-----	-----
(FRLS) +	18386.00	24339.00	-	-----	-----
(FRLS) +	22944.00	30383.00	-	-----	-----
(FRLS) +	30571.00	40244.00	-	-----	-----

Polycab PVC Insulated, PVC Round Sheathed MultiCore Industrial Flexible Cables conforming to IS694:2010 with Bright Annealed Copper Conductor for Voltage Grade 1100 Volts

Rate Per Meter

COND. AREA SQ.MM	COND. CONST. (NO./ DIA.MM)	AMPS.	7 Core	8 Core	10 Core	12 Core	14 Core	16 Core	19 Core	24 Core
0.50	16/0.20	05	101.50	122.00	151.00	176.00	203.00	231.00	269.00	339.00
0.75	24/0.20	08	146.00	172.00	213.00	250.00	291.00	332.00	389.00	486.00
1.00	32/0.20	13	186.00	220.00	272.00	321.00	377.00	428.00	502.00	631.00
1.50	30/0.25	17	262.00	301.00	381.00	450.00	533.00	616.00	712.00	910.00
2.50	50/0.25	24	424.00	507.00	625.00	752.00	868.00	993.00	1152.00	1489.00
4.00	56/0.30	30	703.00	-----	-----	-----	-----	-----	-----	-----



PRICE-LIST • Dated : 4th JULY 2024 • W.E.F. : 24th JULY 2024 • LP NO. 07/2024-25

**FRLS INSULATED SINGLE CORE UNSHEATHED INDUSTRIAL FLEXIBLE CABLE**

Polycab FRLS Insulated Single Core Unsheathed Industrial Flexible Cable conforming to IS694:2010 with Bright Annealed Copper Conductor for Voltage Grade 1100 Volts. (0.5SQ.MM. to 95SQ.MM. 100 Mtrs PKG.)

Polycab FRLS Insulated Single Core Unsheathed Industrial Flexible Cable conforming to IS694:2010 with Bright Annealed Copper Conductor for Voltage Grade 1100 Volts. (100 Meter Packing.)

Rate Per Meter

Rate Per Meter

COND. AREA SQ.MM	COND. CONST. (NO./DIA.MM)	AMPS.	SINGLE CORE	PKG Single Core	2 Core	3 Core	4 Core	PKG. 2-4 Core	5 Core	6 Core
0.50	16/.2	5	13.45	24	36.70	49.40	62.65	5	77.65	92.75
0.75	24/.2	8	18.85	24	48.85	66.65	85.00	5	109.60	132.25
1.00	32/.2	13	23.70	20	61.25	84.40	108.15	5	141.00	169.50
1.50	30/.25	17	34.05	16	83.05	116.75	150.75	5	193.00	235.00
2.50	50/.25	24	56.40	12	133.75	185.25	244.25	4	314.50	380.25
4.00	56/.3	30	86.85	8	199.25	284.00	373.00	-	498.00	596.00
6.00	84/.3	38	130.00	6	291.00	417.50	546.00	-	734.00	881.00
10.00	80/.4	52	230.50	1	495.00	718.00	945.00	-	1266.00	-----
16.00	126/.4	70	357.00	1	781.00	1132.00	1489.00	-	1944.00	-----
25.00	196/.4	88	560.00	1	1294.00	1872.00	2448.00	-	3530.00	-----
35.00	276/.4	110	783.00	1	1802.00	2602.00	3424.00	-	4838.00	-----
50.00	396/.4	145	1115.00	1	2558.00	3707.00	4893.00	-	7003.00	-----
70.00	354/.5	215	1578.00	1	3632.00	5141.00	6798.00	-	9577.00	-----

**SINGLE CORE INDUSTRIAL CABLE (MULTISTRAND) 200 / 300 METER**

Polycab FR/FRLS Insulated Single Core Unsheathed Industrial (Multistrand) Cables - Flame Retardant Lead Free (FRLF)/ Heat Resistant Flame Retardant Low Smoke Halogen-Lead Free Conforming To IS - 694:1990 With Bright Annealed Electrolytic Bare Copper Conductor For Voltage

Rate Per Coil

**PRICE-LIST**

Dated : 4th JULY 2024 • W.E.F. : 24th JULY 2024 • LP NO. 07/2024-25

SQ.MM	AMP.	FR-LF		FRLS-H		GREEN WIRES		COIL PER BOX
		300 Mtr.	200 Mtr.	300 Mtr.	200 Mtr.	300 Mtr.	200 Mtr.	
1.00	12	7110	-----	7320	-----	7440	-----	8
1.50	16	10460	-----	10775	-----	10925	-----	6
2.50	22	16975	-----	17495	-----	17745	-----	4
4.00	29	-----	17455.00	-----	17985	-----	18240	4
6.00	37	-----	26100.00	-----	26890	-----	27290	3
10.00	45	-----	45745.00	-----	47075	-----	47770	1
16.00	68	-----	71785.00	-----	73900	-----	74980	1



**PRICE-LIST • Dated : 4th JULY 2024 • W.E.F. : 24th JULY 2024 • LP NO. 07/2024-25**

**POLYCAB INDUSTRIAL COPPER BRAIDED (SCREENED) CABLES**

Polycab Annealed Bare Cu Flexible Conductor PVC Insulated, Tinned Cu Braided (Screened) PVC Sheathed Flexible Unarmoured Cables 1100 Volts.

**Rate Per Meter**

CORES	SQ.MM										
	0.5	0.75	1.0	1.5	2.5	4	6	10	16	25	35
2	103.50	126.50	143.30	173.50	264.00	361.00	508.00	-	-	-	-
3	120.40	155.00	194.00	241.00	352.00	555.00	776.00	1175.00	1778.00	3348.00	4394.00
4	149.00	194.00	237.00	295.00	445.00	678.00	945.00	1581.00	2550.00	4036.00	5588.00
6	201.00	264.00	310.00	419.00	670.00	-	-	-	-	-	-
7	216.00	304.00	352.00	464.00	757.00	-	-	-	-	-	-
8	251.00	361.00	401.00	536.00	791.00	-	-	-	-	-	-
10	318.00	398.00	533.00	672.00	884.00	-	-	-	-	-	-
12	361.00	450.00	571.00	757.00	1034.00	-	-	-	-	-	-
14	398.00	533.00	670.00	907.00	1243.00	-	-	-	-	-	-
16	426.00	620.00	752.00	1001.00	1463.00	-	-	-	-	-	-
19	508.00	735.00	888.00	1243.00	1889.00	-	-	-	-	-	-
24	613.00	821.00	1115.00	1523.00	2368.00	-	-	-	-	-	-

**OVERALL SHIELDED-UNARMOURED INSTRUMENTATION CABLES**

Flexible Bare Copper Conductor PVC Insulated, Cross Laid Up, Overall Aluminium Mylar Tape Shielded Along with ATC Drain Wire PVC Outer Sheath Instrumentation Unarmoured Cables.

**Rate Per Meter**

CORES	0.5 SQ.MM.	0.75 SQ.MM.	1.0 SQ.MM.	1.5 SQ.MM.	2.5 SQ.MM.
2	65.00	84.00	100.00	130.00	204.00
3	81.00	110.00	133.00	176.00	282.00
4	100.00	133.00	170.00	227.00	355.00
5	124.00	166.00	202.00	275.00	450.00
6	142.00	188.00	235.00	332.00	539.00
7	156.00	220.00	273.00	372.00	639.00
8	176.00	237.00	304.00	418.00	711.00
10	210.00	295.00	372.00	516.00	870.00
12	248.00	345.00	441.00	611.00	1068.00
14	288.00	403.00	510.00	703.00	-----
16	325.00	452.00	573.00	811.00	-----
19	372.00	539.00	677.00	943.00	-----
24	464.00	662.00	838.00	1205.00	-----

**SOLAR DC CABLE**

ATC Conductor LSOH Outersheath (Type-1) (Black Colour With Red Strip/Black Color) in Coil of 500 Mtrs.

SIZE IN SQ. MM.	RATE
4	97.10
6	143.10

**SOLID ALUMINIUM CONDUCTOR**

**FLAT SERVICE CABLES**

POLYCAB PVC INSULATED AND SHEATHED TWIN CORE FLAT & THREE CORE ROUND CABLES 1100 VOLTS EACH CORE HAVING SINGLE SOLID ALUMINIUM CONDUCTOR SERVICE CABLES AS PER IS 694

CORES	SQ. MM.	RATE PER METER
2	2.5	70.95
2	4	94.60
2	6	125.75
2	10	183.00

**INDUSTRIAL WELDING CABLES**

**POLYCAB** Annealed Bare Copper Conductor Flexible Welding Cable Generally Conforming to IS 9857

CONDUCTOR AREA SQ.MM.	CURRENT CARRYING CAPACITY	RATE PER METER	CONDUCTOR AREA SQ.MM.	CURRENT CARRYING CAPACITY	RATE PER METER
16.00	120	426.50	70.00	600	1850.00
25.00	160	667.00	95.00	700	2438.00
35.00	230	921.00	120.00	1100	3119.00
50.00	400	1309.00	-----	-----	-----



PRICE-LIST • Dated : 2nd JULY 2024 • W.E.F. : 24th JULY 2024 • LP NO. 05/2023-24

**LAN (COMPUTER) CABLES**

Polycab Make Solid Copper Conductor, Polyethylene Insulation, twisted Pairs, Lay-up, Ext Grey Fr Outer Sheathed Unarmoured Cable As Per Spec. TIA/EIA 568 B2

TYPE	UNARMOURED		ARMOURED
	SPEED & COLOUR	Rate per 305 MTRS	RATE PER MTR
CAT-5	SPEED 1 GBPS for 250 MHZ GREY COLOUR	11950	-----
CAT-6 UTP	SPEED 1 GBPS for 250 MHZ Blue / Yellow COLOUR	12550	110.66
CAT-6A UTP	SPEED 1 GBPS for 250 MHZ GREY COLOUR	15280	-----
CAT-6 FTP	SPEED 1 GBPS for 250 MHZ GREY COLOUR	19840	-----

**TELEPHONE (SWITCHBOARD) CABLES**

Polycab High Conductivity Solid Annealed Bare Copper industrial Telephone (Switchboard) Cables with High Density Polyethylene Insulation, Paired, Polyester and Sheathed with High Oxygen Index, Fire Retardant, PVC Compound, Grey Outer Sheath generally conforming ITD Specification.

NO. OF PAIRS	RATE PER METER		90 METERS		PKG.
	0.4 MM	0.5 MM	0.4 MM	0.5 MM	
2 PAIR	13.35	18.90	1205.00	1705.00	20
3 PAIR	---	28.00	---	2520.00	16
4 PAIR	---	36.95	---	3330.00	12
5 PAIR	---	45.85	---	4130.00	8
10 PAIR	---	89.15	---	8030.00	1
20 PAIR	---	172.60	---	15500.00	1
50 PAIR	---	447.50	---	---	1
1000 PAIR	---	876.00	---	---	1

**COAXIAL CABLES**

Polycab PVC/Xlpe Insulated and PVC Sheathed Industrial 3Core Flat Laminated Aluminium Tape and Aluminium Wire Braid, Jelly Flooded PVC Black Jacketed Industrial Coaxial Cables.

TYPE	UNARMOURED		ARMOURED
	RATE PER 100 MTR	RATE PER 305 MTR.	RATE PER MTR
RG - 59	2290	7000	-----
RG - 6	2880	8820	95.00
RG - 11	6560	20100	148.20
RG - 06 CCS	1865	5680	-----
RG - 11 CCS	3755	11450	-----

**INDUSTRIAL SPEAKER WIRE (OXYGEN FREE)**

SPEAKER WIRES (OXYGEN FREE COPPER CONDUCTOR)

SIZE	RATE	SIZE	RATE
23/36	1905	23/38	1290
40/36	2915	40/38	2140
70/36	3950	70/38	2900

SIZE	RATE
1.00 SQ. MM.	3460.00
1.50 SQ. MM.	5140.00
2.50 SQ. MM.	8535.00

**SUBMERSIBLE CABLES**

Polycab PVC / Xlpe Insulated and PVC Sheathed Industrial 3 Core Flat Submersible Cable with Bare Bunched Copper Conductor for Submersible Pump Motors with Voltage Grade 1100 Volts as per IS:694/2010 (500 Meters Packing)

CONDUCTOR AREA SQ. MM.	RATE PER METER
1.50	97.50
2.50	151.30
4.00	223.00
6.00	328.85
10.00	572.40
16.00	885.30
25.00	1386.45
35.00	1917.35

**CCTV CABLES**

SIZE	UNARMOURED 90 MTRS	UNARMOURED 180 MTRS	UNARMOURED 300 MTRS
3 + 1	3765.00	7530	12550
4 + 1	4095.00	8190	13650
SIZE	ARMOURED RATE PER MTRS		
4 + 1	129.20		

**\* OUR BANK DETAILS \***

Name : Vashi Integrated Solutions Limited.  
Bank Name : HDFC BANK LTD.  
Branch : Mumbai-Sandoz House  
Bank A/C No.: 50200050070484  
IFSC Code.: HDFC0000240



PRICE-LIST • Dated : 1st MAY 2024 • W.E.F. : 1st MAY 2024 • LP NO. 02/2024-25

**POLYCAB COPPER ARMoured CABLES**

**RATE PER METER**

PVC/XLPE ARMoured Cables with COPPER Conductor 650/1100 V. Grade Confirming to IS:7098 (Pt-1) 1988.

NO. OF CORES	1.5 SQ. MM. 2XWY / 2XFY	2.5 SQ. MM. 2XWY / 2XFY	CROSS SECTION IN SQ. MM.	2 CORE	3 CORE	3.5 CORE	4 CORE	5 CORE	6 CORE
2	205.00	289.00	4	392.00	525.00	-----	672.00	945.00	1134.00
3	255.00	373.00	6	536.00	740.00	-----	950.00	1271.00	1554.00
4	315.00	467.00	10	856.00	1175.00	-----	1538.00	2090.00	-----
5	378.00	557.00	16	1250.00	1838.00	-----	2371.00	2867.00	-----
6	442.00	659.00	25	2152.00	2937.00	3520.00	3872.00	5280.00	-----
7	494.00	749.00	35	2948.00	3982.00	4615.00	5254.00	7150.00	-----
8	636.00	863.00	50	3850.00	5443.00	6424.00	7282.00	9790.00	-----
10	719.00	1040.00	70	5720.00	7920.00	9035.00	10318.00	-----	-----
12	788.00	1208.00	95	0.00	10824.00	12511.00	14740.00	-----	-----
14	898.00	1404.00	120	0.00	13882.00	17050.00	18619.00	-----	-----
16	1008.00	1594.00	150	0.00	17655.00	20625.00	23650.00	-----	-----
19	1197.00	1880.00	185	0.00	22440.00	26257.00	29975.00	-----	-----
24	1498.00	2352.00	240	0.00	29150.00	33891.00	38669.00	-----	-----
			300	0.00	36740.00	42489.00	49170.00	-----	-----
			400	0.00	47190.00	53702.00	65737.00	-----	-----

**POLYCAB ALUMINIUM ARMoured CABLES**

**RATE PER METER**

PVC/XLPE ARMoured Cables with ALUMINIUM Conductor 650/1100 V. Grade Confirming to IS:7098 (Pt-1) 1988.

CROSS SECTION IN SQ. MM.	1 CORE	2 CORE	3 CORE	3.5 CORE	4 CORE
2.5	-----	163.00	181.00	-----	202.00
4	-----	185.00	198.00	-----	232.00
6	-----	224.00	245.00	-----	292.00
10	-----	284.00	316.00	-----	402.00
16	182.00	323.00	340.00	-----	430.00
25	240.00	344.00	435.00	505.00	541.00
35	290.00	430.00	575.00	639.00	728.00
50	358.00	556.00	748.00	865.00	973.00
70	458.00	744.00	1026.00	1166.00	1322.00
95	549.00	920.00	1263.00	1456.00	1648.00
120	637.00	1098.00	1538.00	1823.00	2010.00
150	759.00	1350.00	1888.00	2161.00	2471.00
185	933.00	1623.00	2339.00	2736.00	3040.00
240	1153.00	2152.00	2986.00	3435.00	3925.00
300	1419.00	2637.00	3689.00	4227.00	4838.00
400	1792.00	3424.00	4716.00	5400.00	6220.00

TERMS : (1) All Taxes Extra as applicable. (2) Rates are subject to change without prior notice. (3) This cancels all our previous Price Lists.



PRICE-LIST • Dated : 1st MAY 2024 • W.E.F. : 1st MAY 2024 • LP NO. 02/2024-25

**POLYCAB H.T. XLPE ARMoured ALUMINIUM CABLES**

"POLYCAB" Brand Stranded Compact Circular Aluminium Conductor, Conductor Screen With Extruded Semi Conducting Compound, XLPE Insulated, Insulation Screening with extruded Semi Conducing Compound in combination with Copper Tape, cores laid up, innersheath of PVC tape, galvanised flat steel strip armoured and overall PVC Sheathed Cable conforming to IS 7098/ (PART-II) 1985 with latest amendments. **RATE PER METER**

COND. CROSS SECTION IN SQ. MM.			6.6 KV (UE) 11 KV (E)	22 KV (E)	33 KV (E)
3	X	35	1453.00	-----	-----
3	X	50	1737.00	-----	-----
3	X	70	2116.00	-----	-----
3	X	95	2400.00	3311.00	4386.00
3	X	120	2897.00	3720.00	4945.00
3	X	150	3394.00	4266.00	5315.00
3	X	185	3870.00	4816.00	5934.00
3	X	240	4689.00	5685.00	7009.00
3	X	300	5547.00	6665.00	7912.00
3	X	400	6940.00	8084.00	9589.00

**NOTE : ROUND WIRE ARMOURING FOR H.T. CABLES ADD 25% EXTRA IN ABOVE RATES.**

PRICE-LIST • Dated : 1st MAY 2024 • W.E.F. : 1st MAY 2024

**OVERALL SHIELDED-ARMoured INSTRUMENTATION CABLES**

"POLYCAB" Str/Solid Cu PVC XLPE Insulated Core/Pair/Traid Quad laid up together with Al (Inner sheathed GI Steel Wire Mylar/Drain Wire) Round/Strip PVC Outer Sheathed Instrumentation. **RATE PER METER**

TYPE	NO.	SIZE	RATE	SIZE	RATE	SIZE	RATE	SIZE	RATE	SIZE	RATE
PAIR	1	0.5	134	0.75	156	1	174	1.5	208	2.5	285
PAIR	2	0.5	196	0.75	235	1	271	1.5	337	2.5	483
PAIR	3	0.5	235	0.75	295	1	351	1.5	449	2.5	667
PAIR	4	0.5	281	0.75	358	1	432	1.5	564	2.5	847
PAIR	5	0.5	329	0.75	425	1	520	1.5	689	2.5	1048
PAIR	6	0.5	379	0.75	494	1	602	1.5	803	2.5	1222
PAIR	8	0.5	466	0.75	619	1	764	1.5	1029	2.5	1578
PAIR	10	0.5	558	0.75	735	1	922	1.5	1254	2.5	1925
PAIR	12	0.5	632	0.75	859	1	1085	1.5	1469	2.5	2294
PAIR	16	0.5	793	0.75	1061	1	1375	1.5	1895	2.5	2967
TRIAD	1	0.5	163	0.75	196	1	221	1.5	274	2.5	379

LP NO.02/2024-25

**JELLYFILLED ARMoured TELEPHONE CABLES**

**RATE PER METER**

NO. OF PAIRS	ARMoured (0.50 MM)
5	174
10	278
20	405
50	872
100	1850
200	3398

TERMS : (1) All Taxes Extra as applicable. (2) Rates are subject to change without prior notice. (3) This cancels all our previous Price Lists.

**OUR BANK DETAILS**

**Beneficiary Name : Vashi Integrated Solutions Limited.**

Bank Name : HDFC BANK LTD.  
Bank A/C No.: 50200050070484











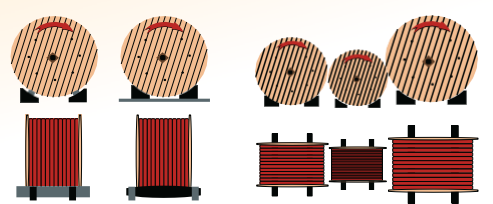
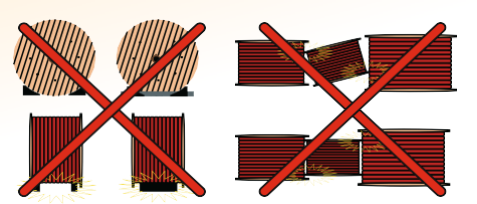
Bank Name : HDFC BANK LTD.  
IFSC Code.: HDFC0000240



**Cable Handling & Storage**

- Great care is taken in the manufacturing of cable to ensure quality at every stage.
- Handling of cable at site is the next important factor to ensure that by mishandling the cable, the outer sheath and insulation shall not get damaged.

The handling is generally carried out by unskilled or semi-skilled men, strict supervision should be maintained so that the cables, which can be very easily damaged, is handled with great care.

DO	DON'T
	<p>Never drop reels. If reels must be rolled, roll in opposite direction of the cable wraps to keep cable from loosening on the reel.</p> 
<p>If a forklift is used for handling and shifting the cable drum, the forks shall approach the reel from the flange side. The forks shall be positioned such that the reel is lifted with both reel flanges.</p> 	<p>Do not allow the lift forks to contact the cable. Care must be taken by the forklift operator not to make sudden turns or stops.</p> 
<p>When using a hoist, install a mandrel through the reel arbor holes and attach a sling. Use a spreader bar approximately 6 inches longer than the overall reel width placed between the sling ends just above the reel flanges.</p> 	<p>This may lead to the bending of the reel flanges and mashing the cable.</p> 
<p>It is always safer to use a strong and well-drained surface for storing drums. If possible, the drums should be raised from the ground by the insertion of wooden planks, etc, below and on both sides of the drums : some check pieces should be placed so as not to allow the drums to be rolled loosely and easily. Cable drums should also be stored away from the direct sun and rains.            Reason : Direct sunrays can cause deterioration due to UV rays and rain can cause damage to wooden drum, resulting drum collapse after few months.</p> 	<p>Multiple reels stacked on top of each other ("Pancake" storage) is not recommended for cable drums. The weight of the stack can total thousands of kgs. creating an enormous load on the bottom reel. Also, damage to the reel and/or cable will likely occur when the reel is flipped for transit. A concentration of stress on the reel flange may cause it to break and subsequently damage the cable.</p> 
<p>Always use proper stoppers to prevent the drum from rolling.</p> 	<p>When rolling in the direction of the arrow, never roll for more than 5 metres. Otherwise the cable may become unfit for use.</p> 
<p>Ensure stoppers for every drum, to prevent mishaps during storage. Place the wedges by the flanges/full width of the drum</p> 	<p>Allow the drums to roll at any cost. Stack the drums on non-triangular/non-square wedges.</p> 

DO	DON'T
<p>During transportation, fasten drums to the base through the central hole.</p>	<p>Fasten without taking adequate care. Always use support, and tie the drum from both the front and rear.</p>
<p>Use a winch, forklift or makeshift ramp.</p>	<p>Allow one drum to strike another.</p>
<p>On The Ground Cable can be Flaked in a Figure of Eight Formation</p>	<p>Do Not Attempt "coiling" Of Cable On The Ground</p>

**INSTALLATION**

**Unreeling (Cable Pulling)**

- For unreeling cable from a drum it should be mounted on cable jack. The drum should be lifted above the ground with clearance of 50-100 mm so that while unreeling the drum flanges should not touch the ground and get damaged.
- The drum should never be kept flat on its side on the ground and the cable unreeled in coil from the same. This invariably leads to Kinking and bird-caging.
- "Bird-Caging" is a defect caused due to twist of cable during wrong unreeling. It results outersheath crack or cuts and armour swelling. Photograph of birdcaging.



- The technique of pulling cables is also an important, Sub-standard and haphazard handling can cause damage to the cable which may weaken the cable components, and cause a failure in due course. Care must be taken to select a suitable position for the cable drum jacks in order to ensure that the drum may be raised and rotated with full safety. The jacks should therefore be placed on a firm support of thick boards.
- Care should be taken to exert a steady pull avoiding any jerks. Twisting or kinking of cable is very dangerous as this may cause damage to the small size of cable conductors, insulation and sheath, shifting and knife-edging of the armouring and damage to the serving, etc. Care should be taken to avoid short bends and consequent straining of conductors.
- Proper handling of cables is very important both for safety as well as long life of the installation.
- The most common causes of cable failure are due to mishandling of the product at installation stage
- This can be prevented by unwinding the cable by loading the drum on jacks & pulling in the proper direction with stocking or pulling eye.
- For pulling longer lengths and higher diameter of cables Pulling Eyes can be used..
- In case of smaller lengths, pulling is carried out by manual labour and when the length is longer by means of winches or other mechanical means.
- While pulling with a rope, care is necessary to avoid bending of the cable a close watch should be maintained to ensure the cable runs freely over the cable rollers and passes smoothly without rubbing against any surface